APPEARANCE





- > Multi-touch capacitive screen (OS: Windows 7 or above)
- Lux auto brightness
- Integrated dustproof front panel
-) I/O control interface
- > HDMI, DVI, VGA & AV inputs
- High brightness: 350cd/m²
- > High contrast: 800:1












OUTLINE DIMENSION

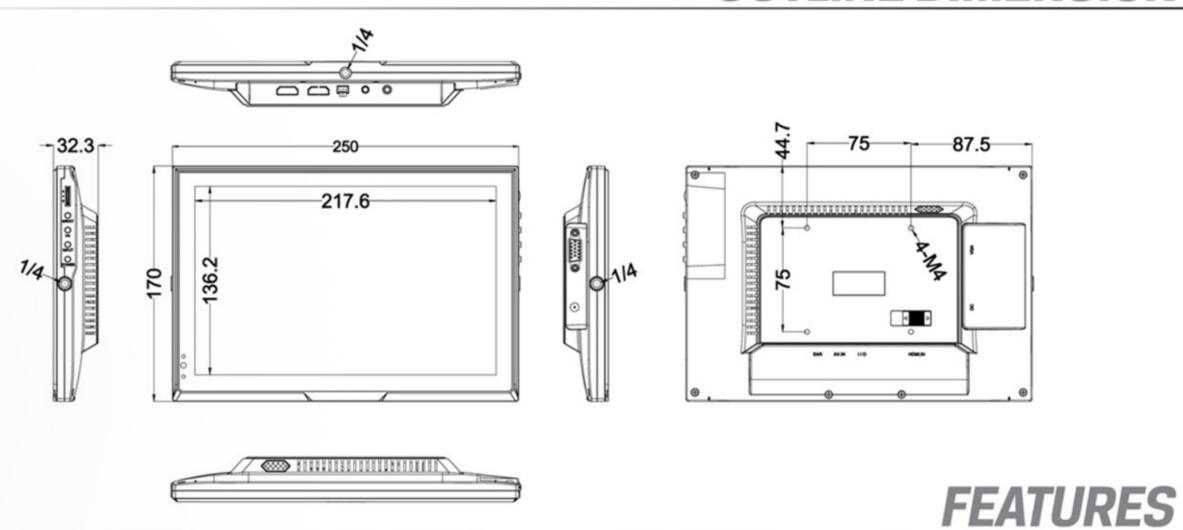

I/O CONTROL INTERFACE

The interface has functions such as connecting with reverse trigger line in car reversing system, and control computer host to switch on/off, etc. Functions also can be customized to meet different demands.



LUX AUTO BRIGHTNESS (optional)

A light sensor designed to detect ambient lighting conditions adjusts the panel's brightness automatically, which makes viewing more conveniently & saves more power.

SPECIFICATIONS / ACCESSORIES

DISPLAY	Panel	10.1" LED backlit	 I/O control line VGA cable HDMI A/A cable
	Touch Panel	Capacitive touch (optional)	
	Physical Resolution	1280 × 800	4. A/V input cable
	Aspect Ratio	16:9	 Remote control 12V DC adapter Gimbal bracket (optional) 75mm VESA folding bracket (optional) HDMI to DVI cable (optional) VESA battery bracket & battery plate VESA rail slot (optional) Car power (optional)
	Brightness	350cd/m ²	
	Contrast	800:1	
	Viewing Angle	170° /170° (H/V)	
INPUT	HDMI	1	
	VGA	1	
	DVI	1 (optional)	
	Composite	1	
	I/O port	1	
AUDIO	Speaker	1	
POWER	Current	800mA	5 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
	Input Voltage	DC 7-24V	
	Battery	External (optional)	
	Power Consumption	≤10W	
ENVIRONMENT	Operating Temperature	0℃~50℃	9 10 0 11
	Storage Temperature	-20°C~60°C	
OUTLINE DIMENSION	Dimension(LWD)	250 × 170 × 32.3mm	
	Weight	560g	

Note: Due to constant effort to improve products and product features, specifications may change without notice.

No. C-3 Xunmei Industrial Area Fengze, Quanzhou Fujian 362000 China Email: fb@newayil.com/sales@newayil.com Tel: +86-595-22519926